


B&T PN PLUG

ASSEMBLY DESCRIPTION

The B & T PN Plug is an equalizing assembly used in conjunction with B & T S Locks to hold pressure from above and below. When the Prong is pulled, pressure is equalized.



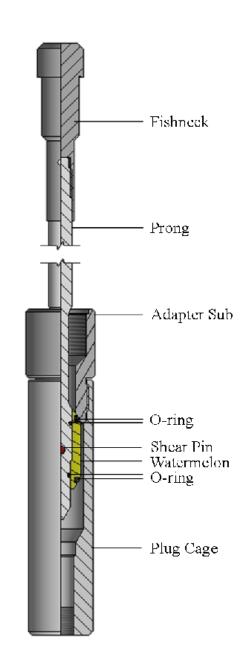

B & T PN PLUG

Specifications			
	2.000	2.500	3.000
Fishneck	1.000	1.000	1.750
Maximum O.D.	1.500	2.000	2.500
Top Connection	1-3/16"-14	1-9/16"-12	2"-12
Bottom Connection	3/8" NPT	3/8" NPT	3/8" NPT
Shear Pin	3/16" x 7/8"	3/16" X 7/8"	3/16" X 7/8"
Pulling Tool	JDCBT-01375-01	JDCBT-01375-01	JDCBT-01375-01

All Specification Tables contain approximated dimensions and should be used for reference only.