




B & T D LOCK

ASSEMBLY DESCRIPTION

The B & T D Lock is used to land and lock in any collar recess of A.P.I. collared tubing. Once the Pack-off Element has been mechanically locked in the set position, pressure can be held from above and below. It can be used with pump thru plugs, positive plugs, safety valves, standing valves, and packoffs.

Pack-off elements are available in a full range of rubber material to meet well-specific conditions. The standard material is NBR. Consult the Elastomer Chart to see all possible compounds.

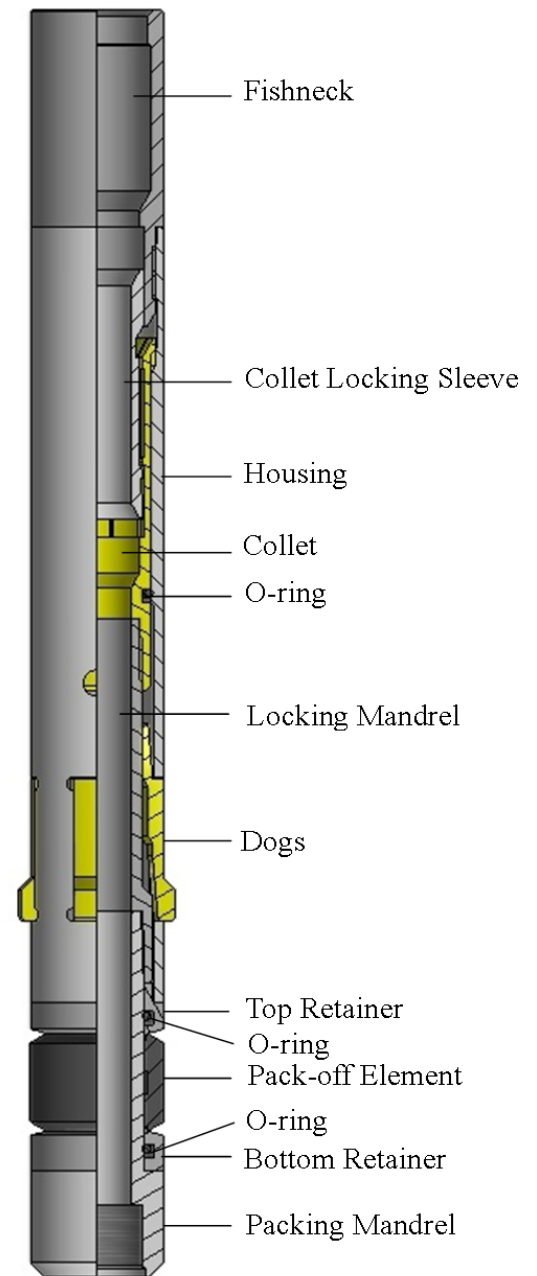



B & T D LOCK

SPECIFICATIONS			
	2.000	2.500	3.000
Fishneck	1.375	1.813	1.313
Maximum O.D.	1.840	1.813	2.313
Minimum I.D.	0.938	1.375	1.750
Connections	1-5/16"-18	1-21/32"-14	2-1/8"-12
Running Tool	DRTBT-02000-01	DRTBT-02500-01	DRTBT-03000-01
Pulling Tool	GSPT-02000-01	GSPT-02500-01	GSPT-03000-01

All Specification Tables contain approximated dimensions and should be used for reference only.