






G PACKOFF

ASSEMBLY DESCRIPTION

The B & T G Packoff is used to seal off holes in the tubing. The G Stop Anchor can be used to keep the G Packoff in the locked position.

The G Packoff can be used as a plug during well completion where Landing Nipples were not installed.

B & T manufactures both the Upper Assembly Fishneck and the Lower Assembly Collet for the G Packoff. These are shown below the main assembly respectively.

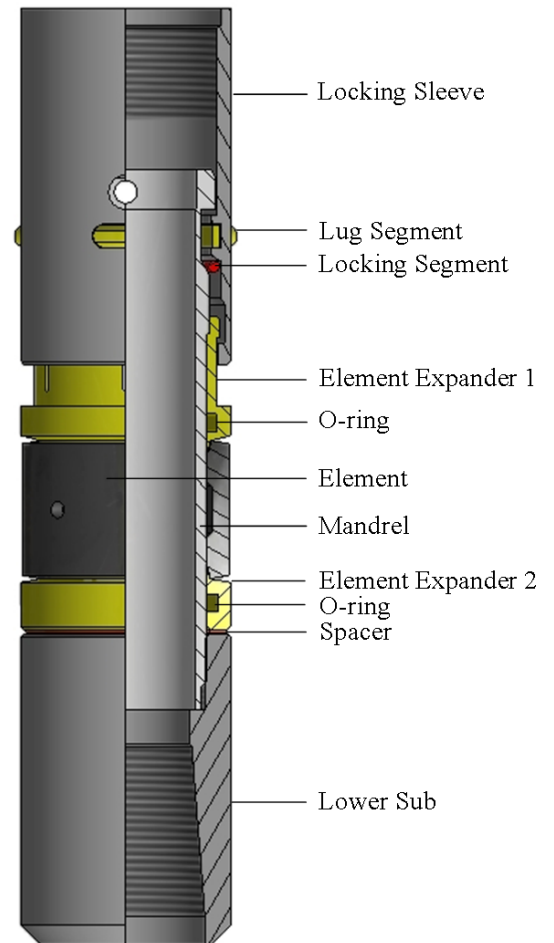



G PACKOFF

SPECIFICATIONS		
	2.000	2.500
Fishneck	1.375	1.813
Maximum O.D.	1.840	2.275
Minimum I.D.	1.063	1.500
Upper Connection	1-5/8"-12	2-1/16"-12
Lower Connection	1"-10	1-1/2"-10

All Specification Tables contain approximated dimensions and should be used for reference only.