




# NON-RELEASEABLE OVERSHOT

## ASSEMBLY DESCRIPTION

B & T's Non-Releaseable Overshot is used to retrieve assemblies that either lack a fishneck or have a broken or damaged fishneck. The Non-Releaseable Overshot latches around the targeted assembly to provide a new fishneck.

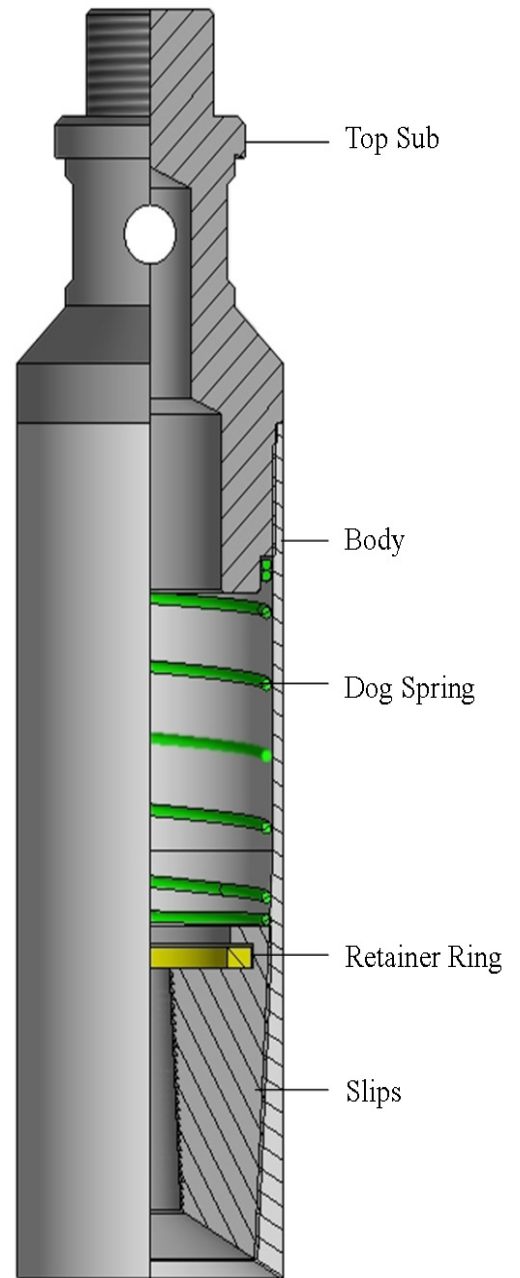



## NON-RELEASEABLE OVERSHOT

SPECIFICATIONS			
	1.500	1.750	2.250
Fishneck	1.375	1.375	1.375
Connections	15/16"-10	15/16"-10	15/16"-10

SPECIFICATIONS			
	2.625	3.800	
Fishneck	1.750	2.313	
Connections	1-1/16"-10	1-3/16"-10	

All Specification Tables contain approximated dimensions and should be used for reference only.