




B & T X PLUG

ASSEMBLY DESCRIPTION

The B & T X Plug is a positive plug used in conjunction with the B & T X Lock to hold pressure from above and below. This plug can be used to test tubing or to plug tubing while doing repairs to surface equipment.

An equalizing Prong is used to knock the collet off seat of the XX Equalizing Sub which allows pressure equalization.

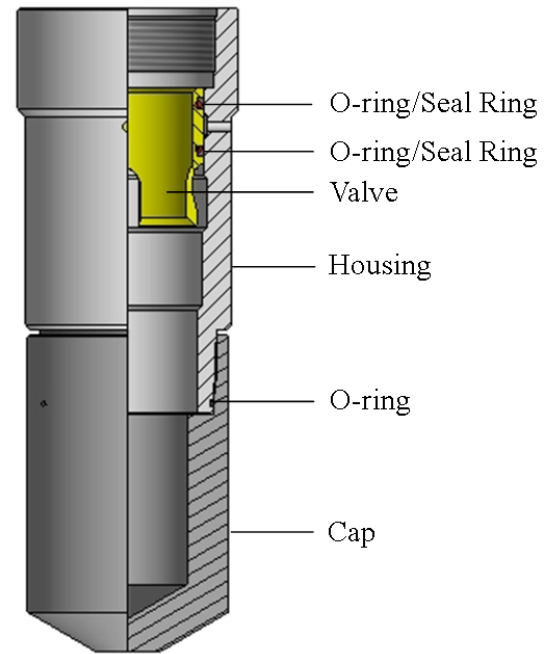



B & T X PLUG

SPECIFICATIONS			
	1.500	1.625	1.875
No-Go O.D.	1.490	1.615	1.865
Connection	1-1/8"-16	1-1/8"-16	1-3/8"-14

SPECIFICATIONS			
	2.313	2.750	2.813
No-Go O.D.	2.300	2.740	2.800
Connection	1-3/4"-12	2-1/4"-12 SLB	2-1/4"-12 SLB

SPECIFICATIONS			
	3.313	3.813	4.562
No-Go O.D.	3.300	3.800	4.552
Connection	2-3/4"-12 SLB	3-1/16"-12 SLB	4"-12 SLB

All Specification Tables contain approximated dimensions and should be used for reference only.