


## **OK-6 KICKOVER TOOL**

## ASSEMBLY DESCRIPTION

The OK-6 Kickover Tool is used in order to install and retrieve 1" O.D. devices into side-pocket mandrels containing an orienting sleeve.

The OK-6 Kickover Tool is very similar to the OK-5 Kickover Tool in that both tools use a ball and spring design in order to allow easy redress operations.

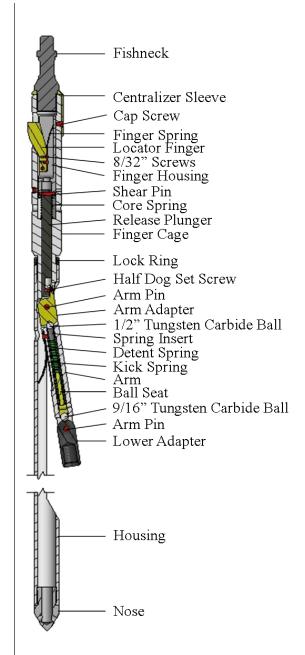



## **OK-6 KICKOVER TOOL**

| Specifications             |                |                |                |
|----------------------------|----------------|----------------|----------------|
|                            | 2.500          | 3.000          | 4.500          |
| Fishneck                   | 1.375          | 1.375          | 1.375          |
| Maximum O.D.               | 2.218          | 2.727          | 3.718          |
| Connections                | 15/16"-10      | 15/16"-10      | 15/16"-10      |
| Length                     | 72.938         | 70.062         | 70.875         |
| Steel Pin- Finger          | 1/4" 1-1/8"    | 1/4" X 1-3/8"  | 1/4" X 1"      |
| Steel Pin- Release Plunger | 3/16" X 1-1/4" | 3/16" X 1-1/2" | 3/16" X 2-1/4" |
| Set Screw                  | 3/8"-16 X 1/4" | 3/8"-16 X 1/4" | 3/8"-16 X 3/8" |
| Button Head Screw          | 1/4"-20 X 3/8" | 1/4"-20 X 3/8" | 1/4"-20 X 3/8" |

All Specification Tables contain approximated dimensions and should be used for reference only.